

# New From Eye Com

The EC402 16mm flow duplex microfilm check camera



A MEDIA INDEPENDENT DOCUMENT MANAGEMENT COMPANY



Eye Communication Systems, Inc.  
455 Industrial Drive  
Hartland, WI 53029-0620 USA  
800/558-2153 • 414/367-1360 • Fax 414/367-1362


# EC402

A MEDIA INDEPENDENT DOCUMENT MANAGEMENT COMPANY




## 16mm flow duplex microfilm check camera

The EC402 camera with interchangeable magazines allows the use of one camera by different departments for separate applications. The built-in automatic feeder plus optional accessories such as endorser, three-level blipping, etc. make this unit particularly useful and flexible for banks.



The camera can be equipped with three-level blip for automatic document retrieval

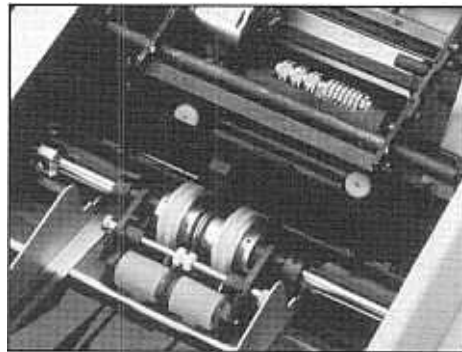

The EC402 camera with joint endfeeder allows the feeding of documents to be endorsed and microfilmed in a single passage.

The endorser (dry type) stamps, dates, numbers up to 13 digits (the last 7 sequential) checks, coupons, slipnotes etc. before they are microfilmed. The endorsement can be positioned by the operator.



All controls and alarms are conveniently located on the front of the camera within clear view.

Endorse only without microfilming by pressing temporarily the no-film button and shutter failure button.

### SPECIFICATIONS

- Max. feeding width: 9-1/2" (24 cm.)  
Reduction factor: 42X (approx. 12,000 checks - 100 foot [30.5 meter] spools)  
Film: Unperforated 16mm 100 foot (30.5 meter) or 200 foot (60 meter spools) (can be loaded in daylight conditions)  
Transport speed: 30,000 checks/hr or 15,000 checks/hr. with the endorser  
Illumination: 16 lamps, 12 volts - variable light positions for different film density  
Film transport: Auto film advance at both ends of the film, manual space button for intermediate spacing  
Document counter: Luminous L.E.D. footage indicator  
Timer: Automatic switch-off of the camera  
Warning system:
  - shutter failure, visual and audible
  - film advance control, visual and audible
  - automatic film advance lamp
  - sound film end signal
  - light intensity control
  - camera stops automatically if a lamp fuses  
Voltage: 115 volts, 60 Hz or 220/240 volts, 50 Hz, 450 watt  
Dimension: 13.8"H x 18.1"W x 24.8"D (35 cm x 46 cm x 63 cm)  
Weight: 82 lbs. (37 Kg.) with built-in conformity with U.L and VDE regulations  
Optional Accessories:
  - Endorser
  - Additional magazine
  - Three-level blip with manual pre-selection of position