

Eye Com R/P 9000

Plain Paper Reader/Printer




XRPRF Roll Carrier 50 Open Spool Manual 16mm Rollfilm Attachment sold separately. Unit standard with 4" x 6" carrier.

Affordable, easy to use and virtually maintenance-free, the R/P 9000 is the clean and simple choice. Disposable toner cartridge houses all key printing components in one unit. Each time you replace the cartridge, you're essentially getting the "guts" of a new machine -- and without the mess of adding toner and emptying waste bottles. The 9000 is available with a wide assortment of lenses and accessories.

1-800-558-2153 (262) 367-1360 Fax (262) 367-1362 www.eyecom.com



Eye Com R/P 9000 Plain Paper Reader/Printer

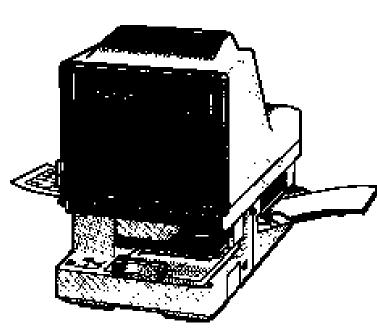

- High-performance printer produces sharp, high contrast prints
- Features include image rotation, interchangeable lenses and front-mounted controls for maximum convenience and versatility.
- Lightweight and compact, the R/P 9000 is truly a desktop reader/printer.

Your Eye Com Dealer is:

SPECIFICATIONS

Screen Size: COM: 8-5/8"H x 11-13/16"W

(220mm x 300mm)

Projection System: Rear

Indexing: Interchangeable grids (24X, 42X, 48X)

Color: Beige

Print Process: R/P Cartridge System, single component

dry toner projection development system

Paper Supply: 50-sheet external tray

Effective Printing

Area: A4. 8-1/4" x 11-11/16" (210mm x 297mm)

and/or Letter 8-1/2" x 11" (216mm x

279mm)

Warm-up Time: 24 seconds

Print Speed: 4 pages/minute

Magnifications: With Image Rotation:

19x, 24X, 29X, 33X, 36X, 42X, 46X, 48X, 54X, 62X, 74X, 94X, 145X

Without Image Rotation:

12X, 19X, 24X COM, 29X (42X COM), 33X, 36X (48X COM), 42X, 46X, 48X, 54XC (72X COM), 62X, 74X, 94X. 145X

Dimensions: 22-3/8"H x 18"W x 28-1/8"D

(568mm x 457mm x 715mm)

Weight: 62 lbs. (28kg) Uncrated

94 lbs. (43kg) Crated

Lamp: DDF, 55W, 17V Eye Com

60W, 17V Canon

Certification: UL/CSA

Accessories: Interchangeable Lenses, Roll Carrier 50

Open Spool 16mm Rollfilm Attachment, Electronic Masking Kit, Zoom Lenses, Coin Boxes, Dustcover, Light Shield,

Turntable, Print Counter

Application: Source or COM from Microfiche

16mm Rollfilm

Carrier: Standard: 4" x 6" automatic opening

Optional: 4"x6" Aperture Card automatic

opening

Modes: Negative Only

Electrical: 120V, 60Hz only